


**EXPOSURE OF CONTENT IN EXTREME CONDITIONS.** IP65 conditioned monitor for unprotected outdoor locations, configurable in either portrait or landscape format. Several monitors can be stacked together to form either a two-sided structure or a video wall.

Designed to IP65\* and IK10 specifications for a more robust outdoor solution, the eMonitor Xtrem range is characterised by its resistance to water and extreme temperatures. It includes low-reflective, high-transmission vandal-resistant glass, intelligent air conditioning, anti-fogging, anti-graffiti and anti-corrosion treatments.

The Xtrem Series eMonitor is available in various screen sizes: 32", 43", 49", 55" and 65". It has an anchoring system for easy installation and a wall mounting kit that regulates the viewing angle and can be customised in any colour from the RAL range and/or with cut vinyl, digital image and fretwork.



PRODUCT PROFILE

**Manufacturer:** Grupo EOS Ibérica  
**Origin:** Manufactured and assembled in Spain.

**Production:**  
 > 4 weeks (estimated time).

**Material:**  
 > 1.5 / 5 mm carbon steel sheet.

**Flanges/Interior fastenings:**  
 > Galvanised sheet metal.

**Finish:**  
 > Textured high resistance epoxy paint.

**Watertightness and sealing:**  
 > IP65\*.

**Dimensions:** > 1240x785x281 mm:  
 > 1240x785x281 mm.

**Structure weight:**  
 > 50Kg.

**Use:**  
 > Outdoor.

STANDARD SPECIFICATIONS

**Display:**  
 > 24/7 Industrial LCD.

**Screen size:**  
 > 32", 43" (horizontal) Touch.  
 > 49" 55", 65" (landscape) Non-touch

**Number of screens:**  
 > 1

**Video output:**  
 > HDMI, DVI, SVGA.

**Screen protection:**  
 > Antivandal glass 3+3 mm.

**Accesses:**  
 > 1 Door with security lock.

**Connections:**  
 > Internal terminal strip with I/O switch.

**Structure colour** ● Textured or plain.

**Colour of the front** ○ RAL 9003/9007 plain.

OPTIONAL COMPONENTS

**Touch screen:**  
 > IR 3mm or Capacitive 6mm technology.

**Fanless Industrial PC:**  
 > Atom /Celeron, i3, i5, i7.

**Operating System:**  
 > Android, Windows or Linux.

**External connections:**  
 > RJ45/IEC/ I/O switch /Wifi antenna.

**Electrical panel:**  
 > Terminal, circuit breaker and differential.  
 > Power supplies 5/12/24v.

**Uninterruptible Power Supply System:**  
 > UPS 6 sockets/15 min.

**Personalisation/Customisation:**  
 > Cut vinyl/digital image.  
 > Airbrushing or multicolour graffiti.  
 > Industrial painting in various Colours RAL.

OPTIONAL ADAPTATIONS


**Cooling system:**  
 > Forced ventilation.

**Customised front with fretwork:**  
 > With or without led backlighting.

PRODUCT VALUES

> Product for outdoor use IP65, watertight and vandalproof.  
 > Multiple display options both vertically and horizontally.  
 > Intelligent temperature control system.  
 > Legible in the sun, with automatic brightness adjustment to the level of outdoor brightness.  
 > High-transmission glass and anti-reflection protection.

PRODUCT SIZES AND PRODUCT VERSIONS

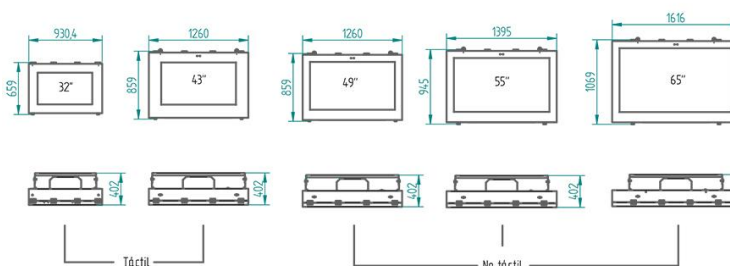

MOST COMMON APPLICATIONS

> Information point.  
 > Digital Signage.  
 > Smartcity.  
 > Train stations and airports.  
 > Theme parks.

ALTERNATIVE REFERENCES

> e1000.  
 > eTotem.  
 > eTotem Xtrem.  
 > eTotem Xtrem DS.  
 > ePie Xtrem.

MOST COMMON SECTORS

> Sport and Leisure.  
 > Tourism.  
 > Communication, advertising and marketing.  
 > Industry.  
 > Construction and civil works.  
 > Logistics and transport.  
 > Airports and seaports.  
 > Underground, train and bus stations.

SUCCESS STORIES



DETAIL



SUCCESS STORIES



DETAIL

