

ACCESIBLES IN Series

Wall-mounted digital kiosk, side maintenance

Indoor Kiosk

AUTONOMOUS INTERACTIVE KIOSK IN WALL-MOUNTED FORMAT. Specially designed for high-traffic healthcare environments with limited space.

Its compact 19" format frees up space and autonomously speeds up turn and queue management. It stands out for its modularity: it supports health or ID card readers, QR and QR+RFID readers and a printer for queue tickets and receipts.

It is customised in any RAL colour with cut vinyl or digital print, with the option to back-cut the front. To meet accessibility protocols, it integrates Braille labels and a NaviLens QR sticker.



PRODUCT PROFILE

Manufacturer: Grupo EOS Ibérica
Origin: Manufactured and assembled in Spain
Estimated lead time: 4 weeks

STRUCTURAL DESIGN RATINGS

Impact rating (IK) : > IK07
Sealing rating (IP) : > IP44
Security rating (G) : > G01

MATERIALS - DIMENSIONS - WEIGHT

Material:
 > 1.5 mm carbon steel sheet
Internal brackets/fixings:
 > Galvanised steel sheet
Dimensions:
 > 675 x 522 x 221 mm
Structure weight:
 > 22 kg NET (without peripherals)

STANDARD SPECIFICATIONS

Screen: 19" 16:10/ 250 nits -1440x900 WXGA+
Format: Horizontal **Contrast:** 1:100:1
Protection: Anti-vandal glass 3+3

APERTURA Y PUERTAS DE MANTENIMIENTO

Access: Side - **Installation:** Rear
Maintenance access: 2 side doors.
Security lock: 2 units (single key).

FINISH

Epoxy powder industrial paint
Structure & trim colour
 Any RAL colour
Personalisation:
 > Cut vinyl & digital print
 > Back-cut with blue RAL 5012 background
 > Braille labels + NaviLens QR sticker

INTEGRATED PERIPHERALS

Touch screen:
 > Multi-touch capacitive technology IK10 / 6 mm
Ticket printer:
 > 80 mm ticket printer, auto-cut.
2D barcode reader + QR + RFID + Mifare
 > HW 1820C reader + QR + RFID + Mifare
Magnetic stripe reader + chip
 > Health card reader CRT-288 USB/RS232
Speakers
 2 x integrated 1 W speakers
Microphone
 Built-in Electret DSP IP65
Headphone jack
 Standard 3.5 mm jack
Extension antenna
 HDF200 2m SMA
Forced ventilation
 Active 80x80 / 220 V ventilation
External connections:
 > RJ45/IEC/ I/O switch


OPTIONAL PERIPHERALS

Fanless Industrial PC:
 > To choose
Operating System:
 > To choose
Readers:
 > DNle
 > Fingerprint reader
Uninterruptible Power Supply:
 > 6-socket UPS / 15 min
Electrical cabinet:
 > Terminal block, breaker and RCD
 > Power supplies 5/12/24 V
External connections:
 > RJ45/IEC/ I/O switch / WiFi antenna
Personalisation/Customisation:
 > Cut vinyl / Digital print
 > Airbrushing or multicolour graffiti
 > Industrial paint in various **Colours RAL**

PRODUCT VALUES

> Integration of multiple peripherals
 > Ideal for people with disabilities and children
 > Anti-vandal protection
 > Customisable front.

PRODUCT SIZES AND PRODUCT VERSIONS

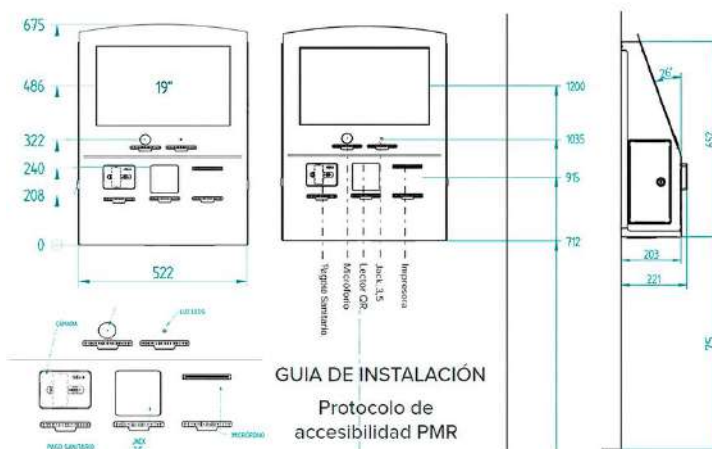

MOST COMMON APPLICATIONS

> Interactive information point
 > Queue management
 > Appointment management
 > Turn management
 > Service sales
 > Citizen self-service

ALTERNATIVE REFERENCES

> eMural
 > ePay
 > ePos
 > eClinic
 > e700
 > eCitizen
 > ePrinter
 > eDirectorio


MOST COMMON SECTORS

> Public hospitals & private clinics
 > Tourism, hospitality & catering
 > Museums & libraries
 > Public admin (eGovernment, official bodies, corporations)
 > Logistics & transport
 > Trade fairs, congresses & exhibitions
 > Supermarkets

SUCCESS STORIES



DETAIL

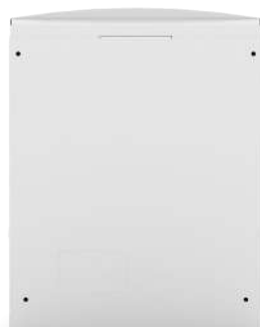

SUCCESS STORIES



DETAIL

